



Assembly and Operating Instructions for JUMBUCK Barbecues

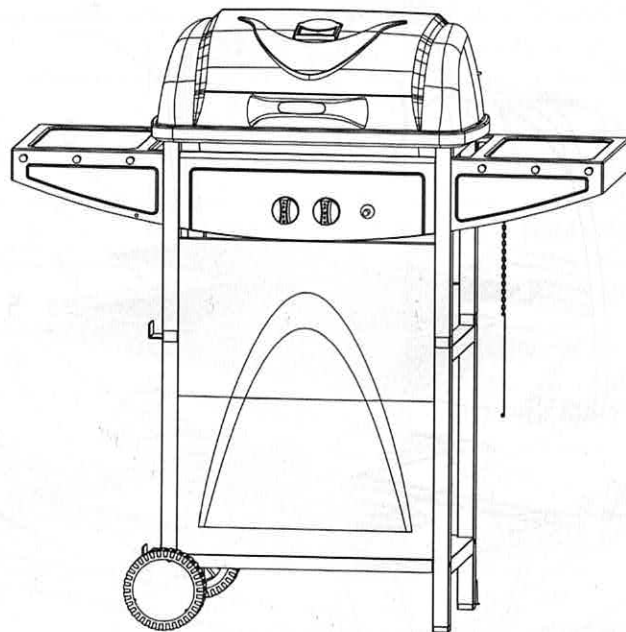

Line drawings are not to scale. Actual products may differ from drawing depend on model purchased, .Specifications subject to change without notice.



WARNING

HAZARDOUS FIRE OR EXPLOSION MAY RESULT IF INSTRUCTIONS ARE IGNORED.

It is the consumer's responsibility to see that the barbecue is properly assembled, installed, and taken care of. Failure to follow instructions in this manual could result in bodily injury and/or property damage.

FOR YOUR SAFETY

If you smell gas:

1. Shut off gas to the appliance.
2. Extinguish any open flame.
3. Open barbecue hood.
4. If odour continues, immediately call your gas supplier or your local fire department.

PRECAUTIONS

1. Leak test all connections after each tank refill.
2. Never check for leaks with a match or open flame.
3. Do not store or use gasoline or other flammable vapours and liquids in the vicinity of this or any other appliance.

FOR OUTDOORS USE ONLY. PLEASE READ INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING. RETAIN THIS MANUAL FOR FUTURE REFERENCE.

F. Care and Maintenance

Periodically clean your barbecue between uses and especially after extended periods of storage. Never douse the barbecue with water when its surfaces are hot.

1) Care of Burners

Ensure that there are no signs of blockage (debris, insects) in either the burner portholes, the primary air inlet, or the neck of the burners. Use compressed air or pipe cleaner wire to clear obstructions. A wire brush can be used to remove corrosion from the burner surfaces.

2) Cast Iron Grill and Plate

The cast iron grill and plate can be cleaned with soap and hot water. Dry thoroughly after washing. Corrosion can be removed with a scourer or brush. Coating the cast-iron with a small amount of cooking oil after cleaning can help to prevent corrosion.

3) Storage

Store your barbecue in a cool dry place. Cover the burners with aluminium foil in order to prevent insects or other debris from collecting in burner holes. The gas cylinder should be disconnected from the barbecue and stored outdoors. When using the barbecue after extended periods of storage, please follow all of the care and maintenance instructions. For storage and cylinder exchange, disconnect hose at the cylinder only. Do not disconnect hose from the appliance.

Diagrammatical Representation of "OUTDOOR AREAS"

This appliance shall only be used in an above ground open-air situation with natural ventilation, without stagnant areas, where gas leakage and products of combustion are rapidly dispersed by wind and natural convection.

Any enclosure in which the appliance is used shall comply with one of the following:

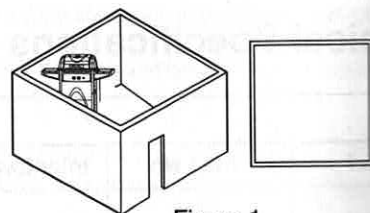


Figure 1

An enclosure with walls on all sides, but at least one permanent opening at ground level and no overhead cover. (figure 1)

Within a partial enclosure that includes an overhead cover and no more than two walls. These walls may be parallel or at right angles to each other. (figure 2 & 3)

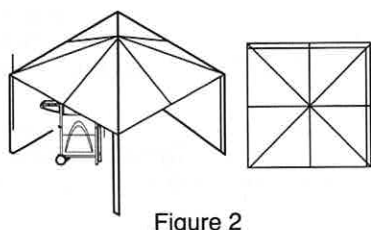


Figure 2

Both End Open

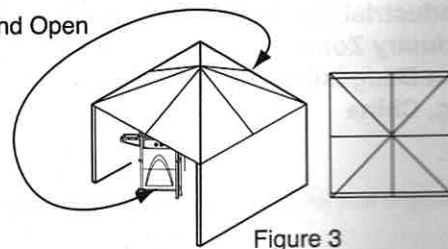


Figure 3

Within a partial enclosure that includes an overhead cover and more than two walls, the following shall apply:

- One wall that is equivalent to at least 25% of the total wall area is completely open. (figure 4)
- 30% or more in total of the remaining wall area is open and unrestricted. (figure 5)

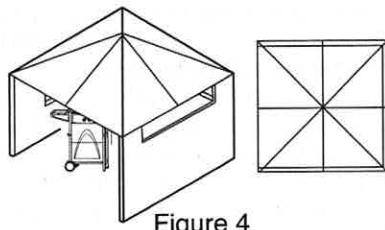


Figure 4

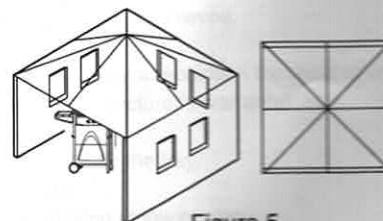


Figure 5

In the case of balconies, at least 20% of the total of the side, back and front wall areas shall remain open and unrestricted.